


# Super O \_Floor



26,6 cm  
10,5 in

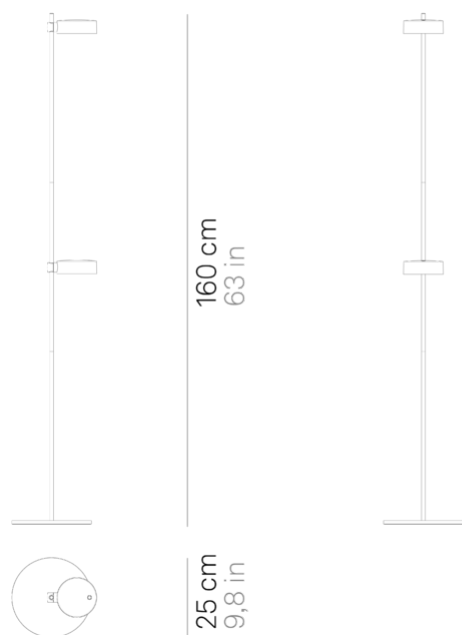

LED sostituibile da utente



IP65

LD1155

|       |    |       |    |
|-------|----|-------|----|
| White | B3 | Black | N3 |
|-------|----|-------|----|



DESIGN IN ITALY BY ZAFFERANO SRL, China

Zafferano SRL - Viale dell'Industria, 26 31055 Quinto di Treviso  
- Italy [www.zafferanoitalia.com](http://www.zafferanoitalia.com)

# Super O \_Floor

## Lighting specifications


|                   |                            |
|-------------------|----------------------------|
| source            | LED sostituibile da utente |
| type              | SMD                        |
| total power       | 2x35 W                     |
| power LED         | 2x30 W                     |
| color temperature | 2700 - 3150 - 4000 K       |
| lumen lamp        | 2x226 - 2x262 - 2x261 lm   |
| lumen LED         | 2x287 - 2x331 - 2x336 lm   |
| beam angle        | 94°                        |
| CRI               | > 90                       |
| class             | F                          |
| dimmer            | TOUCH DIMMER               |
| motion sensor     | NO                         |

## Electrical specifications

|               |  |
|---------------|--|
| classe        | 3  |
| input         | 100-240V                                       |
| output        | 5 Vdc max 2A                                   |
| battery life  | 100% 11 h. - 60% 18 h. - 30% 36 h. - 6% 160 h. |
| charging time | 5 H.   |

## ACCESSORIES

### LD0300UC



4.4 cm • 4.4 cm • 3.6 cm • IP20  
• 100-240V • 50/60 Hz



■ Black

### LD0340RA



6 cm • 13.5 cm • 4.5 cm • 2x35 W  
• IP20 • 100-240V • 50/60 Hz



■ Black

### LD1060

Ø 3 cm • 1 cm • IP20  
• 5 Vdc max 2A • 50/60 Hz





RB

### LD1060



Ø 12.5 cm • 4.3 cm • 2x35 W  
• 287 - 331 - 336 lm  
• 2700 - 3150 - 4000 K • IP65  
• CRI > 90 • 5Vdc max. 2A • 50/60 Hz



■ White

B3

■ Black

N3